


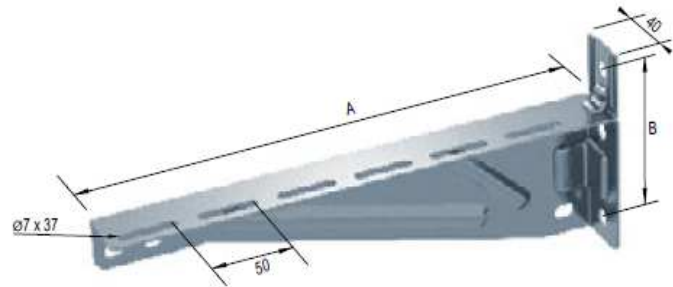

PRODUCT SPECIFICATION

SUPPORT REINFORCED SQUARE (G)

TYPE	MATERIAL	COATING	A	B	(AWL) (N)	PACKING (Uds.)	PLAIN
							
AISCAN-ESCRS10	METALLIC	HOT DIP GALVANISED	125	96	1167	5	
AISCAN-ESCRS15	"	"	175	96	1167	5	
AISCAN-ESCRS20	"	"	225	96	2020	5	
AISCAN-ESCRS30	"	"	325	96	1143	5	
AISCAN-ESCRS40	"	"	425	155	1872	5	
AISCAN-ESCRS50	"	"	525	155	1201	5	
AISCAN-ESCRS60	"	"	625	155	1338	5	
EDITION DATE	EDITION NUMBER	DOCUMENT ID.					
2014/09	3	EP - ESCRS					

CHARACTERISTICS STANDARD IEC 61537:2007		OBSERVATIONS
DESCRIPTION:	HOT DIP GALVANISED, SUPPORT REINFORCED SQUARE.	
COATING:	HOT DIP GALVANISED IN ACCORDING TO UNE-EN ISO 1461:2010.	
MATERIAL:	METALLIC	
ELECTRICAL CONTINUITY:	YES	
FLAME PROPAGATE:	NO	
OPERATING TEMPERATURE RANGE:	-50 °C / 150 °C	
RESISTANCE TO CORROSION:	CLASS 6	
IMPACT RESISTANCE:	20 J A -40 °C	
		THE INSTALLATION OF THIS PRODUCT WILL BE CARRIED OUT ACCORDING TO THE R.E.B.T.